

## APPLICATION



Suitable for water, oil, gasses and non-abrasive media  
(Refer to corrosion resistance table for valve materials selection).

## SPECIFICATION

End Connection	Screwed End BSPT
Nominal Pressure	16 Bar
Working Temperature	Up to 120°C
Test Pressure	Conform to ISO 5208

## MATERIALS

PARTS	FIG. 18S1
1. Body	Brass
2. Float	Heat Resistance Resin
3. O-ring	EPDM
4. Seat	Brass
5. Cover	Brass
6. Plug	Brass B16 (CuZn39Pb3)

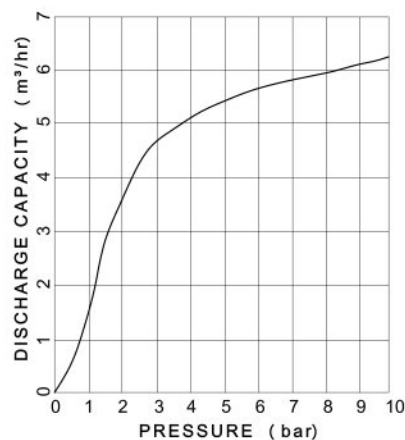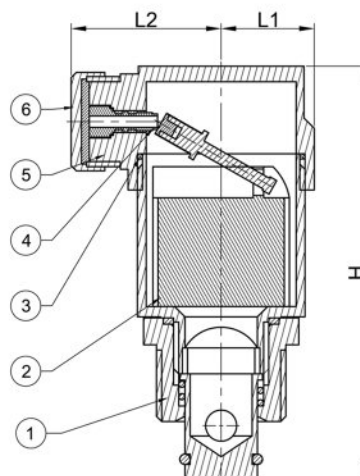

# AUTOMATIC AIR VENT

## BRASS



**FIG 18S**

## DIMENSIONS (mm)

Size	Inlet Size	L1	L2	H
15A	1/2" BSPT	19	30	75
20A	3/4" BSPT	19	30	75
25A	1" BSPT	19	30	75

\*The specifications are subject to change without further notice