



PNEUMATIC ACTUATOR



Your trusted partner

- Higher performance and reliability
- Fully compliance with all the latest international standards
- Wide range options in technical specification and highly cost-effective
- Compact housing design, suitable for any application and working environment



DESIGN AND CONSTRUCTION


DESIGN

Valmatic pneumatic actuators introduces rack and pinion design improvements for greater reliability. Valmatic is committed to offer reliable products by combining our long field experience in product application and the latest production and material technology available in the market today. The improved design has consistently been verified in practice. Valmatic pneumatic actuators have advantageous characteristics in:

- Reliability
- High performance
- Fully compliance with all the latest international standards
- Extensive products range allows best versatility at lower price
- Innovations and patented solutions for a universal drive shaft
- Multifunction position indicator
- Compact and light

CONSTRUCTION

1. A single compact design utilizing identical body and end caps for both double acting and spring return models. This feature reduces inventory and allows field conversion, by adding or removing modular spring cartridges.
2. Full conformance to following latest specifications: ISO 5211, DIN 3337 and VDI/VDE 3845 for product interchangeability and easy mounting of solenoids, limit switches and other accessories.
3. Valmatic piston rack and pinion design for compact construction, symmetric mounting position, high-cycle life and fast operation. Reverse rotation can be accomplished in the field by simply inverting the pistons.
4. Two independent external travel stop adjustments permit easy and precise adjustment of +/- 5° in both directions. This adjustment may be made in either the open or closed position and provides for accurate valve alignment.
5. Multiple bearings and guides on pistons and racks for precise operation, low friction, high cycle life and a blowout proof pinion shaft.
6. Electroless nickel-plated blowout resistant, bearing guided, one-piece pinion shaft for improved safety and maximum cycle life.
7. High precision teeth on piston racks and pinion shaft for accurate positioning, low backlash, and maximum engagement resulting in overall efficient operation.
8. Extruded aluminum body with both internal and external corrosion protections having a honed cylinder surface for longer life and a lower coefficient of friction.
9. Modular preloaded spring cartridges designed with coated springs for simple range versatility, greater safety and corrosion resistance.
10. Selected high quality bearings and seals that provide a wide operating temperature range, low friction, and high cycle life.
11. Internal and external stainless steel fasteners for long term corrosion resistance.
12. Multifunctional position indicator for visual position indication, and a direct, easy, economical way to mount popular sensors.

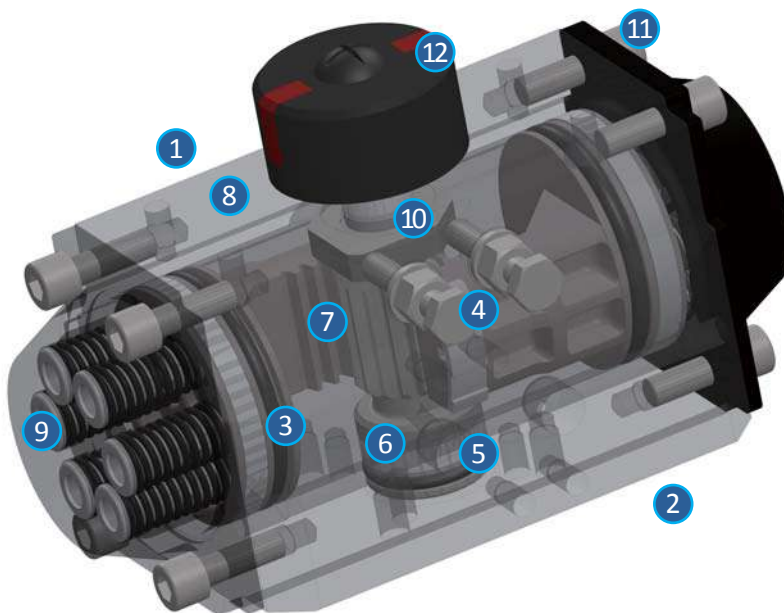

RANGE OF OPTIONS, QUALITY MANUFACTURING, AND ACCESSORIES

RANGE OF OPTIONS

- A. Stainless steel 304 or 316 drive shafts are available on request for all sizes no matter the type of corrosion protection selected.
- B. For extremely high or low temperature applications, all models may be equipped with FPM or Silicon O rings along with an Valmatic tested and certified suitable lubricant.
- C. Other than the standard double square bottom drive shaft connection, we can supply a keyed drive connection, a flat head connection or a special personalized drive connection.


QUALITY MANAGEMENT

- Production conforms to ISO9001.
- Each individual actuator has been factory inspected and tested and given a serial number for full traceability.
- Each individual actuator is individually packed in a special cardboard carton for protection, with a product description label for easy identification and includes installation, operation and maintenance instructions.

ACCESSORIES AVAILABLE

- Different Square reductions suitable for drive shaft
- Centering rings for all sizes
- Brackets
- Couplings
- Solenoid valves
- Switch boxes
- Proximity switches
- Gear boxes
- Positioners

PARTS AND MATERIALS

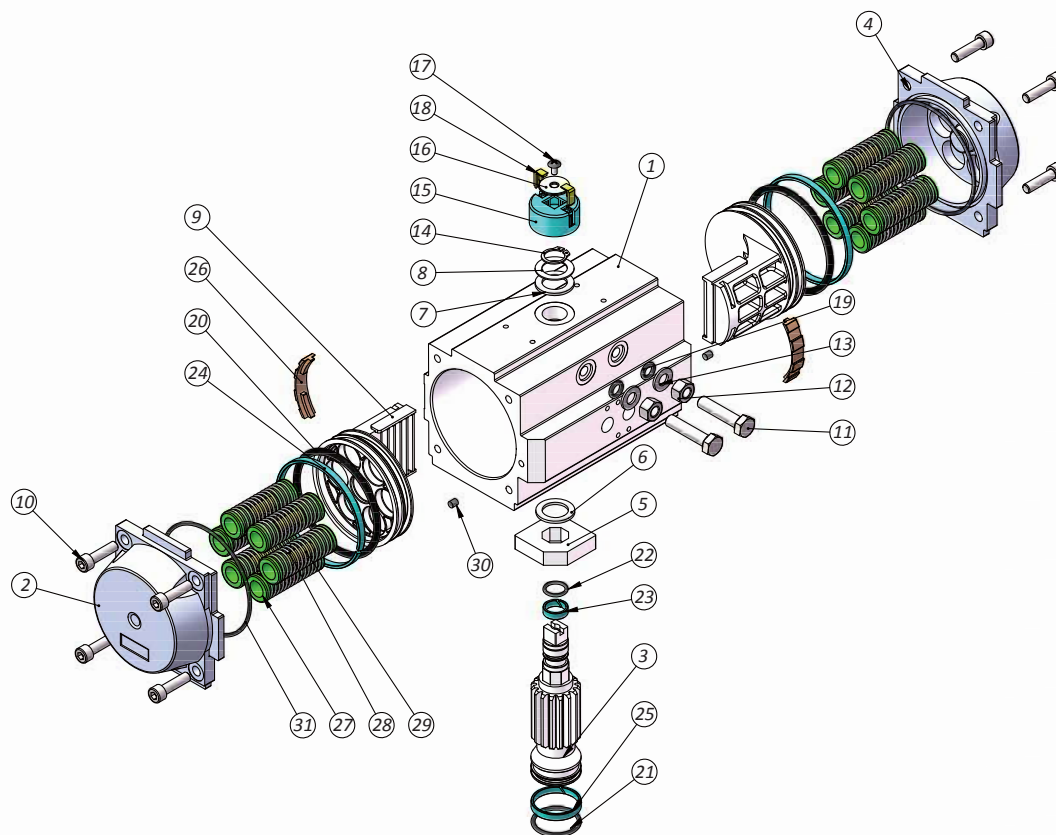

Item Number	Part Description	Material Quality	QTY	Item Number	Part Description	Material Quality	QTY	Item Number	Part Description	Material Quality	QTY
1	Body	Aluminium alloy	1	12	Nut(stop screw)	Stainless steel	2	23	Bearing(pinion top)	POM+PTFE	1
2	Left End cap	Aluminium alloy	1	13	Washer (stop screw)	Stainless steel	2	24	Bearing(pinion head)	POM+PTFE	2
3	Drive shaft	Alloy Steel	1	14	Spring clip	Spring steel	1	25	Bearing(pinion bottom)	POM+PTFE	1
4	Right end cap	Aluminium alloy	1	15	Position indicator	Nylon	1	26	Wear band	Nylon	2
5	OCTI-CAM	Alloy Steel	1	16	Indicator thrust bearing	Stainless steel	1	27	Spring seat	Nylon	24
6	Thrust bearing (pinion top)	POM+PTFE	1	17	Cap screw	Stainless steel	1	28	Spring	High-carbon steel	12
7	Thrust bearing	POM+PTFE	1	18	Color code	Nylon	2	29	Straining beam	Copper pipe	12
8	Thrust washer	Stainless steel	1	19	"o" ring(stop screw)	NBR	2	30	Plug	NBR	2
9	Piston	Aluminium alloy	2	20	"o" ring(piston)	NBR	2	31	"o" ring(end cap)	NBR	2
10	Cap screw (end cap)	Stainless steel	8	21	"o" ring(pinion bottom)	NBR	1				
11	Stop top screw	Stainless steel	2	22	"o" ring(pinion top)	NBR	1				

TECHNICAL DATA (METRIC UNIT)

Model TypeA	VT032		VT050		VT065		VT075		VT085		VT095		VT110		VT125		VT140		VT160		VT190		VT210		VT240		VT270		VT300		VT350		VT400	
	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S	D	S		
Diameter (mm)	32		50		65		75		85		95		110		125		140		160		190		210		240		270		300		350		400	
Air Volume Opening [l]	0.03		0.09		0.19		0.30		0.44		0.88		0.83		1.41		1.76		2.85		4.75		6.60		11.40		15.80		19.09		27.65		42.81	
Air Volume Closing [l]	0.04		0.15		0.32		0.50		0.66		1.17		1.27		2.13		2.72		4.08		7.20		10.29		15.10		18.80		28.23		44.10		62.05	
Opening Time [sec]	0.3	0.3	0.9	0.4	0.9	0.4	0.9	0.9	1.0	0.9	1.4	0.9	1.4	1.3	2.4	1.3	2.8	2.0	4.8	2.2	2.4	2.9	3.4	3.2	3.8	4.4	5.0	5.0	6.0	6.2	7.4	7.5	9.6	
Closing Time [sec]	0.4	0.4	0.7	0.4	0.8	0.4	0.9	0.9	1.2	1.0	1.4	1.0	1.6	1.4	2.4	1.4	3.0	2.4	4.9	2.6	3.0	3.8	4.1	3.7	4.0	4.9	5.5	6.0	6.8	7.2	8.4	8.5	10.6	
Weight (Kg)hai	0.47	0.59	1.13	1.25	1.97	2.21	2.93	3.29	3.78	4.26	5.14	5.86	6.09	7.17	10.86	12.54	13.77	15.93	20.15	23.75	28.41	33.81	40.03	48.43	52.6	77.76	73.64	90.6	108	135.6	146.7	188.1	220.5	283.5

1. For model 32-160

(1) Room temperature (2) Actuator stroke 90° (3) Solenoid valve with orifice of 4 mm and a flow capacity Qn400L/min (4) Inside pipe diameter 6 mm (5) Medium clean air (6) Air supply pressure 5.5 bar (7) Actuator without external resistance load

2. For model 190-400

(1) Room temperature (2) Actuator stroke 90° (3) Solenoid valve with orifice of 12 mm and a flow capacity Qn5100L/min (4) Inside pipe diameter 8 mm (5) Medium clean air (6) Air supply pressure 5.5 bar (7) Actuator without external resistance load



Cautions: obviously on the field applications when one or more of the above parameter are different, the moving time will be different

Air consumption rest with air supply, air volume and action cycle times. Expressions:

$$L/min = \text{Air volume} (\text{opening air volume} + \text{closing air volume}) \times \left[\frac{\text{Air Supply (Kpa)} + 101.3}{101.3} \right] \times \text{Action times} (\text{min})$$



METRIC TORQUE RATINGS

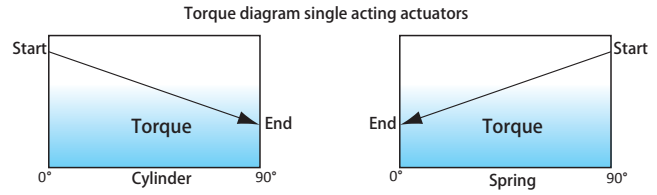

Model	Supply Pressure (Unit:bar)									
	2.5	3	3.5	4	4.5	5	5.5	6	7	8
VT032	2.9	3.4	4.0	4.6	5.3	5.9	6.5	7.1	8.3	9.5
VT050	8.6	10.4	12.3	14.2	16.0	17.9	19.8	21.6	25.4	29.1
VT065	17.4	21.2	25.0	28.7	32.5	36.3	40.1	43.9	51.4	59.0
VT075	27.0	32.9	38.8	44.7	50.5	56.4	62.3	68.2	79.9	91.7
VT085	39.7	48.3	56.9	65.6	74.2	82.8	91.4	100.1	117.3	134.6
VT095	55.7	67.9	80.0	92.1	104.2	116.4	128.5	140.6	164.8	189.1
VT110	72.0	89.3	105.0	120.6	136.3	152.0	167.6	183.3	214.6	245.9
VT125	128.7	159.5	187.5	215.4	243.4	271.4	299.4	327.4	383.3	439.3
VT140	196	237	278	319	360	401	442	483	565	647
VT160	263.5	326.6	383.9	441.2	498.5	555.8	613.1	670.4	785.0	899.7
VT190	428.5	518.0	607.3	696.6	785.9	875.3	964.6	1053.9	1232.5	1411.1
VT210	598.2	723.2	847.9	972.6	1097.3	1222.0	1346.6	1471.3	1720.7	1970.1
VT240	928.3	1122.0	1315.0	1508.0	1702.0	1895.0	2089.0	2282.0	2669.0	3056.0
VT270	1305.0	1577.0	1849.0	2121.0	2393.0	2665.0	2937.0	3209.0	3753.0	4297.0
VT300	1678.6	2029.4	2379.3	2729.2	3079.1	3429.0	3778.9	4128.8	4828.5	5528.3
VT350	2492.5	3011.8	3531.1	4050.4	4569.6	5088.9	5608.2	6127.5	7166.0	8204.6
VT400	3798.1	4589.4	5380.7	6172.0	6963.3	7754.5	8545.8	9337.1	10919.7	12502.2



Model	Supply Pressure (Unit:bar)																		Spring stroke			
	2.5		3		3.5		4		4.5		5		5.5		6		7		8		90°	0°
	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°				
VT050 S05	5.1	3.4	6.9	5.3	8.8	7.2	10.7	9.0	12.5	10.9	14.4	12.8	16.3	14.6	18.1	16.5	21.9	20.2	25.6	23.9	5.2	3.5
VT050 S06	4.4	2.4	6.2	4.3	8.1	6.1	10.0	8.0	11.8	9.9	13.7	11.7	15.6	13.6	17.4	15.5	21.2	19.2	24.9	22.9	6.2	4.2
VT050 S07			5.5	3.2	7.4	5.1	9.3	7.0	11.1	8.8	13.0	10.7	14.9	12.6	16.7	14.4	20.5	18.2	24.2	21.9	7.2	4.9
VT050 S08					6.7	4.1	8.6	5.9	10.4	7.8	12.3	9.7	14.2	11.5	16.0	13.4	19.8	17.1	23.5	20.9	8.2	5.6
VT050 S09							7.9	4.9	9.7	6.8	11.6	8.6	13.5	10.5	15.3	12.4	19.1	16.1	22.8	19.8	9.3	6.3
VT050 S10									9.0	5.7	10.9	7.6	12.8	9.5	14.6	11.3	18.4	15.1	22.1	18.8	10.3	7.0
VT050 S11											10.2	6.6	12.1	8.4	13.9	10.3	17.7	14.0	21.4	17.8	11.3	7.7
VT050 S12													11.4	7.4	13.2	9.3	17.0	13.0	20.7	16.7	12.4	8.4
VT065 S05	8.7	4.3	12.5	8.1	16.3	11.9	20.0	15.6	23.8	19.4	27.6	23.2	31.4	27.0	35.2	30.8	42.7	38.3	50.3	45.9	13.1	8.7
VT065 S06	7.0	1.7	10.7	5.5	14.5	9.2	18.3	13.0	22.1	16.8	25.9	20.6	29.7	24.4	33.4	28.2	41.0	35.7	48.6	43.3	15.7	10.4
VT065 S07			9.0	2.8	12.8	6.6	16.6	10.4	20.4	14.2	24.1	18.0	27.9	21.8	31.7	25.5	39.3	33.1	46.8	40.7	18.3	12.2
VT065 S08					11.0	4.0	14.8	7.8	18.6	11.6	22.4	15.4	26.2	19.1	30.0	22.9	37.5	30.5	45.1	38.1	21.0	13.9
VT065 S09							13.1	5.2	16.9	9.0	20.7	12.7	24.4	16.5	28.2	20.3	35.8	27.9	43.4	35.4	23.6	15.7
VT065 S10									15.1	6.3	18.9	10.7	22.7	13.9	26.5	17.7	34.0	25.2	41.6	32.8	26.2	17.4
VT065 S11											17.2	7.5	21.0	11.3	24.7	15.1	32.3	22.6	39.9	30.2	28.8	19.1
VT065 S12													19.2	8.7	23.0	12.4	30.6	20.0	38.1	27.6	31.4	20.9
VT075 S05	16.3	10.2	22.2	16.0	28.1	21.9	34.0	27.8	39.8	33.7	45.7	39.6	51.6	45.4	57.5	51.3	69.2	63.1	81.0	74.8	16.9	10.7
VT075 S06	14.2	6.8	20.1	12.7	25.9	18.6	31.8	24.4	37.7	30.3	43.6	36.2	49.4	42.1	55.3	47.9	67.1	59.7	78.8	71.4	20.2	12.8
VT075 S07			17.9	9.3	23.8	15.2	29.7	21.1	35.6	26.9	41.4	32.8	47.3	38.7	53.2	44.6	64.9	56.3	76.7	68.1	23.6	15.0
VT075 S08					21.7	11.8	27.5	17.7	33.4	23.6	39.3	29.4	45.2	35.3	51.0	41.2	62.8	53.0	74.5	64.7	27.0	17.1
VT075 S09							25.4	14.3	31.3	20.2	37.1	26.1	43.0	32.0	48.9	37.8	60.7	49.6	72.4	61.3	30.3	19.3
VT075 S10									29.1	16.8	35.0	22.7	40.9	28.6	46.8	34.5	58.5	46.2	70.3	58.0	33.7	21.4
VT075 S11											32.9	19.3	38.7	25.2	44.6	31.1	56.4	42.8	68.1	54.6	37.1	23.5
VT075 S12													36.6	21.8	42.5	27.7	54.2	39.5	66.0	51.2	40.4	25.7
VT085 S05	23.2	13.7	31.8	22.3	40.4	30.9	49.0	39.5	57.6	48.1	66.3	56.8	74.9	65.4	83.5	74.0	100.8	91.3	118.0	108.5	26.1	16.6
VT085 S06	19.8	8.4	28.4	17.0	37.1	25.7	45.7	34.3	54.3	42.9	62.9	51.5	71.6	60.2	80.2	68.8	97.4	86.0	114.7	103.3	31.3	19.9
VT085 S07			25.1	11.8	33.8	20.5	42.4	29.1	51.0	37.7	59.6	46.3	68.3	55.0	76.9	63.6	94.1	80.8	111.4	98.1	36.5	23.2
VT085 S08					30.4	15.2	39.1	23.9	47.7	32.5	56.3	41.1	64.9	49.7	73.6	58.4	90.8	75.6	108.1	92.9	41.7	26.5
VT085 S09							35.8	18.7	44.4	27.3	53.0	35.9	61.6	44.5	70.3	53.2	87.5	70.4	104.8	87.7	46.9	29.8
VT085 S10									41.1	22.1	49.7	30.7	58.3	39.3	67.0	48.0	84.2	65.2	101.5	82.5	52.1	33.1
VT085 S11											46.4	25.5	55.0	34.1	63.6	47.7	80.9	60.0	98.1	77.2	57.3	36.4
VT085 S12													51.7	28.9	60.3	32.5	77.6	54.8	94.8	72.0	62.5	39.7
VT095 S05	33.6	20.9	45.8	33.0	57.9	45.1	70.0	57.3	82.1	69.4	94.3	81.5	106.4	93.6	118.5	105.8	142.7	130.0	167.0	154.2	34.9	22.1
VT095 S06	29.2	13.9	41.4	26.1	53.5	38.2	65.6	50.3	77.7	62.4	89.8	74.5	102.0	86.7	114.1	98.8	138.3	123.0	162.6	147.3	41.8	26.5
VT095 S07			36.9	19.1	49.1	31.2	61.2	43.3	73.3	55.4	85.4	67.6	97.5	79.7	109.7	91.8	133.9	116.1	158.1	140.3	48.8	30.9
VT095 S08					44.6	24.2	56.8	36.4	68.9	48.5	81.0	60.6	93.1	72.7	105.2	84.8	129.5	109.1	153.7	133.3	55.8	35.4
VT095 S09							52.3	29.4	64.5	41.5	76.6	53.6	88.7	65.8	100.8	77.9	125.1	102.1	149.3	126.4	62.7	39.8
VT095 S10									60.0	34.5	72.2	46.7	84.3	58.8	96.4	70.9	120.6	95.1	144.9	119.4	69.7	44.2
VT095 S11											67.7	39.7	79.9	51.8	92.0	63.9	116.2	88.2	140.5	112.4	76.7	48.6
VT095 S12													75.4	44.8	87.6	57.0	111.8	81.2	136.0	105.4	83.6	53.0
VT110 S05	43.4	26.2	60.7	43.4	76.4	59.1	92.0	74.8	107.7	90.4	123.4	106.1	139.0	121.8	154.7	137.4	186.0	168.8	217.3	200.1	45.9	28.6
VT110 S06	37.7	17.0	55.0	34.3	70.6	49.9	86.3	65.6	102.0	81.3	117.6	96.9	133.3	112.6	149.0	128.3	180.3	159.6	211.6	190.9	55.0	34.3
VT110 S07			49.3	25.1	64.9	40.8	80.6	56.4	96.2	72.1	111.9	87.8	127.6	103.4	143.2	119.1	174.6	150.4	205.9	181.8	64.2	40.0
VT110 S08					59.2	31.6	74.9	47.3	90.5	62.9	106.2	78.6	121.9	94.3	137.5	109.9	168.9	141.3	200.2	172.6	73.4	45.8
VT110 S09							69.1	38.1	84.8	53.8	100.5	69.4	116.1	85.1	131.8	100.8	163.1	132.1	194.5	163.4	82.5	51.5
VT110 S10									79.1	44.6	94.8	60.3	110.4	75.9	126.1	91.6	157.4	122.9	188.7	154.2	91.7	57.2
VT110 S11											89.0	51.1	104.7	66.7	120.4	82.4	151.7	113.7	183.0	145.1	100.9	62.9
VT110 S12													99.0	57.6	114.6	73.2	146.0	104.6	177.3	135.9	110.0	68.6

METRIC TORQUE RATINGS




SINGLE ACTING TORQUE RATINGS IN Nm																								
Model	Supply Pressure (Unit: bar)																				Spring stroke			
	2.5		3		3.5		4		4.5		5		5.5		6		7		8					
	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	90°	0°		
VT125 S05	77.7	48.2	108.5	78.9	136.5	106.9	164.4	134.9	192.4	162.9	220.4	190.9	248.4	218.8	276.4	246.8	332.3	302.8	388.3	358.7	80.6	51.0		
VT125 S06	67.5	32.0	98.3	62.8	126.3	90.8	154.2	118.8	182.2	146.8	210.2	174.7	238.2	202.7	266.2	230.7	322.1	286.7	378.1	342.6	96.7	61.2		
VT125 S07			88.1	46.7	116.1	74.7	144.0	102.7	172.0	130.7	200.0	158.6	228.0	186.6	256.0	214.6	311.9	270.6	367.9	326.5	112.8	71.4		
VT125 S08				105.9	58.6	133.8	86.6	161.8	114.5	189.8	142.5	217.8	170.5	245.8	198.5	301.7	254.4	357.7	310.4	428.9	128.9	81.6		
VT125 S09					123.6	70.5	151.6	98.4	179.6	126.4	207.6	154.4	235.6	182.4	291.5	238.3	347.5	294.3	415.0	345.7	145.0	91.8		
VT125 S10								141.4	82.3	169.4	110.3	197.4	138.3	225.4	166.3	281.3	222.2	337.3	278.2		161.1	102.0		
VT125 S11											159.2	94.2			187.2	122.2	215.2	150.2	271.1	206.1	327.1	262.1	177.2	112.2
VT125 S12													177.0	106.1	205.0	134.0	260.9	190.0	316.9	246.0	193.3	122.4		
VT140 S05	114.2	74.1	155.1	115	196.1	156	237.0	196.9	277.9	237.8	318.8	278.7									122.4	82.3		
VT140 S06	97.7	49.6	138.7	90.6	179.6	131.5	220.5	172.4	261.5	213.3	302.4	254.3	343.3	295.2							146.8	98.7		
VT140 S07			122.2	66.1	163.2	107.0	204.1	147.9	245.0	188.9	285.9	229.8	326.9	270.7	367.8	311.6					171.3	115.2		
VT140 S08				146.7	82.5	187.6	123.5	228.6	164.4	269.5	205.3	310.4	246.2	351.3	287.2	433.2	369.0				195.8	131.6		
VT140 S09					171.2	99.0	212.1	139.9	253.0	180.9	294.0	221.8	334.9	262.7	416.7	344.6	498.6	426.4			220.2	148.1		
VT140 S10								195.7	115.5	236.6	156.4	277.5	197.3	318.4	238.2	400.3	320.1	482.1	401.9		244.7	164.5		
VT140 S11											220.1	131.9			261.1	172.8	302.0	213.8	383.8	295.6	465.7	377.5	262.9	181.0
VT140 S12													244.6	148.4	285.5	189.3	367.4	271.1	449.2	353.0	293.6	197.4		
VT160 S05	153.5	101.3	216.6	164.4	273.9	221.7	331.2	279.0	388.5	336.3	445.8	393.6	503.1	450.9	560.4	508.2	675.0	622.8	789.7	737.4	162.3	110.0		
VT160 S06	131.5	68.8	194.6	131.9	251.9	189.2	309.2	246.5	366.5	303.8	423.8	361.1	481.1	418.4	538.4	475.7	653.0	590.3	767.7	705.0	194.7	132.0		
VT160 S07			172.6	99.5	229.9	156.8	287.2	214.1	344.5	271.4	401.8	328.7	459.1	386.0	516.4	443.3	631.0	557.9	745.7	672.5	227.2	154.0		
VT160 S08				207.9	124.3	265.2	181.6	322.5	238.9	379.8	296.2	437.1	353.5	494.4	410.8	609.0	525.4	723.7	640.1		259.6	176.0		
VT160 S09					243.2	149.2	300.5	206.5	357.8	263.8	415.1	321.1	472.4	378.4	587.0	493.0	701.7	607.6			292.1	198.0		
VT160 S10								278.5	174.0	335.8	231.3	393.1	288.6	450.4	345.9	565.0	460.5	679.7	575.2		324.5	220.0		
VT160 S11											313.8	198.9			371.1	256.2	428.4	313.5	543.0	428.1	657.7	542.7	357.0	242.0
VT160 S12													349.1	223.7	406.4	281.0	521.0	395.6	635.7	510.3	389.4	264.0		
VT190 S05	246.8	167.4	336.3	256.9	425.6	346.2	514.9	435.5	604.2	524.8	693.5	614.1									261.2	181.8		
VT190 S06	210.4	115.1	299.9	204.6	389.2	293.9	478.5	383.3	567.8	472.6	657.2	561.9	746.5	651.2							313.4	218.1		
VT190 S07			263.6	152.4	352.9	241.7	442.2	331.0	531.5	420.3	620.8	509.6	710.1	599.0	799.4	688.3					365.6	254.5		
VT190 S08				316.5	189.5	405.8	278.7	495.1	368.1	584.5	457.4	673.8	546.7	779.5	636.0	941.7	814.7				417.8	290.8		
VT190 S09					369.5	226.6	458.8	315.9	548.1	405.2	637.4	494.5	745.2	583.8	905.3	762.4	1084.0	941.1			470.1	327.2		
VT190 S10								422.4	263.6	511.8	353.0	601.1	442.3	710.9	531.6	869.0	710.2	1047.6	888.8		522.3	363.5		
VT190 S11											475.4	300.7			564.7	390.0	676.6	479.3	832.6	658.0	1011.3	836.6	574.5	399.9
VT190 S12													528.4	337.8	642.3	427.1	796.3	605.7	974.9	784.4	628.8	436.8		
VT210 S05	352.8	239.1	477.8	364.1	602.5	488.8	727.2	613.5	851.9	738.2	976.6	862.9	1101.2	987.5	1225.9	1112.2	1475.3	1361.6	1724.7	1611.0	359.1	245.4		
VT210 S06	303.7	167.3	428.7	292.3	553.4	417.0	678.1	541.7	802.8	666.4	927.5	791.0	1052.2	915.7	1176.9	1040.4	1426.2	1289.8	1675.6	1539.2	430.9	294.5		
VT210 S07			379.6	220.5	504.3	345.2	629.0	469.8	753.7	594.5	878.4	719.2	1003.1	843.9	1127.8	968.6	1377.2	1218.0	1626.5	1467.4	502.7	343.6		
VT210 S08				455.3	273.3	579.9	398.0	704.6	522.7	829.3	647.4	954.0	772.1	1078.7	896.8	1328.1	1146.2	1577.5	1395.5		574.6	392.6		
VT210 S09					530.9	326.2	655.6	450.9	780.2	575.6	904.9	700.3	1029.6	825.0	1279.0	1074.3	1528.4	1323.7			646.4	441.7		
VT210 S10								606.5	379.1	731.2	503.8	855.8	628.4	980.5	753.1	1229.9	1002.5	1479.3	1251.9		718.2	490.8		
VT210 S11											682.1	431.9			806.8	556.6	931.5	681.3	1180.9	930.7	1430.2	1180.1	790.0	539.9
VT210 S12													757.7	484.8	882.4	609.5	1131.8	858.9	1381.1	1108.3	861.8	589.0		
VT240 S05	517.8	374.3	711.2	567.7	904.6	761.1	1098.0	954.5	1291.4	1147.9	1484.8	1341.3									554.0	410.5		
VT240 S06	435.7	263.5	629.1	456.9	822.5	650.3	1015.9	843.7	1209.3	1037.1	1402.7	1230.5	1596.1	1423.9							664.8	492.6		
VT240 S07			547.0	346.1	740.4	539.5	933.8	732.9	1127.2	926.3	1320.6	1119.7	1514.0	1313.1	1707.4	1506.5					775.6	574.7		
VT240 S08				658.3	428.7	851.7	622.1	1045.1	815.5	1238.5	1008.9	1431.9	1202.3	1625.3	1395.7	2012.1	1782.5				886.4	656.8		
VT240 S09					769.6	511.3	963.0	704.7	1156.4	898.1	1349.8	1091.5	1543.2	1284.9	1930.0	1671.7	2316.8	2058.5			997.2	738.9		
VT240 S10								880.9	593.9	1074.3	787.3	1267.7	980.7	1461.1	1174.1	1847.9	1560.9	2234.7	1947.7		1108.0	821.0		
VT240 S11											992.2	676.5			1185.6	869.9	1379.0	1063.3	1765.8	1450.1	2152.6	1836.9	1218.8	903.1
VT240 S12													1103.5	759.1	1296.9	952.5	1683.7	1339.3	2070.5	1726.1	1329.6	985.2		
VT270 S05	745.9	519.4	1017.9	791.4	1289.9	1063.4	1561.8	1335.3	1833.8	1607.3	2105.7	1879.2									786.0	559.5		
VT270 S06	634.0	362.2	906.0	634.2	1178.0	906.2	1449.9	1178.1	1721.9	1450.1	1993.8	1722.0	2265.8	1994.0							943.2	671.4		
VT270 S07			794.1	477.0	1166.1	749.0	1338.0	1020.9	1610.0	1292.9	1881.9	1564.8	2153.9	1836.8	2425.9	2108.8					1100.4	783.3		
VT270 S08				954.2	591.8	1226.1	863.7	1498.1	1135.7	1770.0	1407.6	2040.0	1679.6	2314.0	1951.6	2857.9	2495.5				1257.6	895.2		
VT270 S09					1114.2	706.5	1386.2	978.5	1658.1	1250.4	1930.1	1522.4	2202.1	1794.4	2746.0	2338.3	3289.9	2882.2			1414.8	1007.1		
VT270 S10								1274.3	821.3	1546.2	1093.2	1818.2	1365.2	2090.2	1637.2	2634.1	2181.1	3178.0	2725.0		1572.0	1119.0		
VT270 S11											1434.3	936.0			1706.3	1208.0	1978.3	1480.0	2522.2	2023.9	3066.1	2567.8	1729.2	1230.9
VT270 S12													1594.4	1050.8	1866.4	1322.8	2410.3	1866.7	2954.2	2410.6	3864.4	3142.8		
VT300 S05	987.5	646.7	1338.3	997.5	1688.2	1347.4	2038.1	1697.3	2388.0	2047.2	2737.9	2397.1	3087.8	2747.0	3437.7	3096.9	4137.4	3796.6	4837.2	4496.4	1031.9	691.1		
VT300 S06	849.3	440.3	1200.1	791.1	1550.0	1141.0	1899.9	1490.9	2249.8	1840.8	2599.6	2190.7												


INSTALLATION

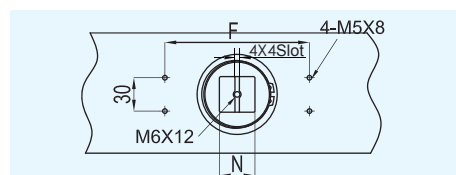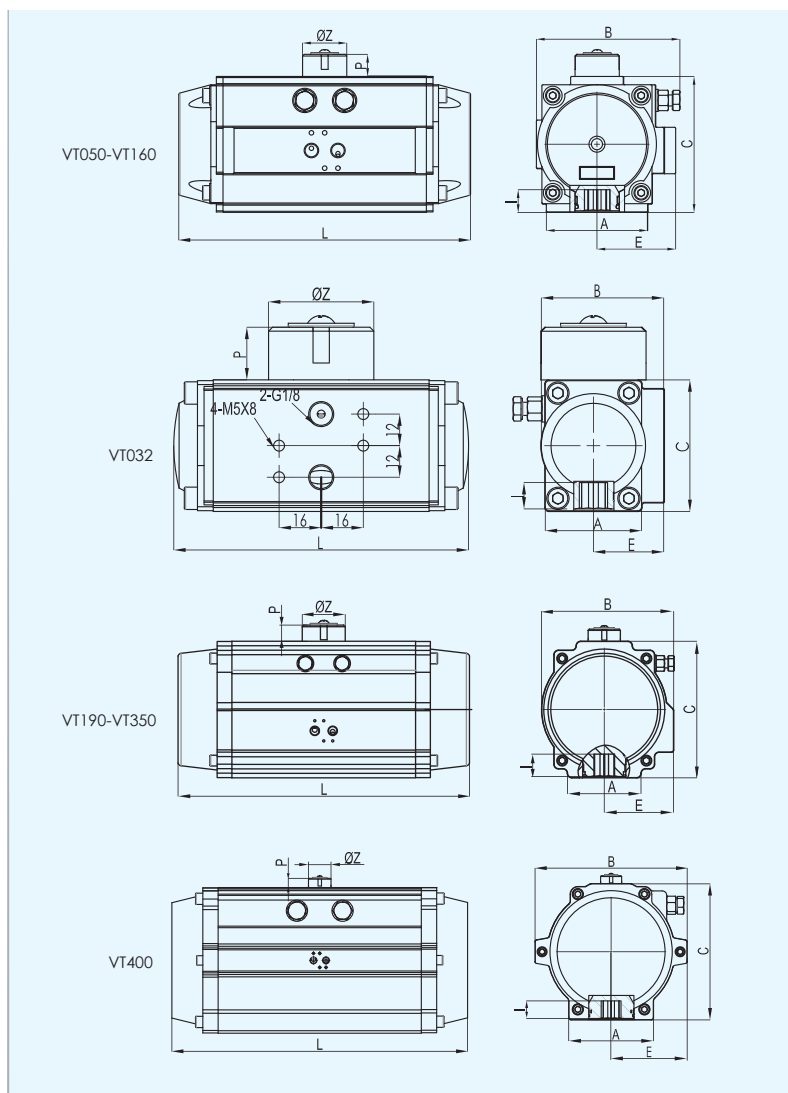

AIR CONNECTION

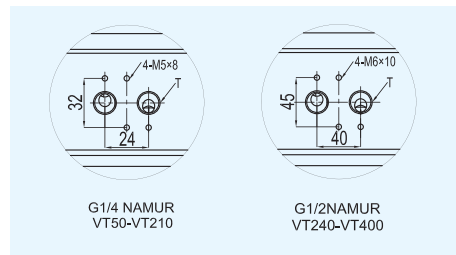

BOTTOM

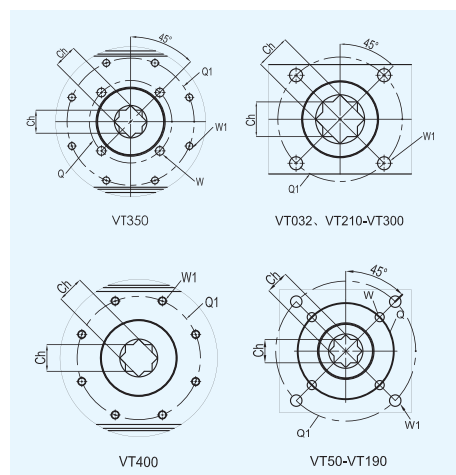

MODEL	A	B	C	L	E	F	P	ØZ	N	I	FLANGE	Q	Q1	W	W1	Ch	T
VT032	37	47	50	110	27	50	20	40	10	10	F03	-	36	-	M5x9	9x9	G1/8"
VT050	45	70.5	70	154	41.5	80	20	40	10	12	F03/05	36	50	M5x7.5	M6x9	11x11	G1/4"
VT065	62	89.5	89	189	51.5	80	20	40	10	16	F05/07	50	70	M6x9	M8x12	14x14	G1/4"
VT075	68	102.5	100	210	59	80	20	40	14	16	F05/07	50	70	M6x9	M8x12	14x14	G1/4"
VT085	68	112.5	113	229	63.5	80	20	40	14	19	F05/07	50	70	M6x9	M8x12	17x17	G1/4"
VT095	92	126	123	264	71	80	20	40	14	19	F05/07	50	70	M6x9	M8x12	17x17	G1/4"
VT110	93	138.5	136	266	76.5	80	20	40	14	19	F07/10	70	102	M8x12	M10x15	17x17	G1/4"
VT125	96	157	161	337	85	80	30	56	22	25	F07/10	70	102	M8x12	M10x15	22x22	G1/4"
VT140	110	178	178	377	97	80	30	56	22	31	F10/12	102	125	M10x15	M12x18	27x27	G1/4"
VT160	112	196	200	412	106	130	30	56	22	31	F10/12	102	125	M10x15	M12x18	27x27	G1/4"
VT190	136	216.5	232	488	112	130	30	56	22	41	F10/14	102	140	M10x15	M16x24	36x36	G1/4"
VT210	140	235.5	255	550	120	130	30	80	32	40	F14	-	140	-	M16x24	36x36	G1/4"
VT240	159	262	292	602	131	130	30	80	32	50	F16	-	165	-	M20x28	46x46	G1/2"
VT270	159	295	331	672	147.5	130	30	80	32	50	F16	-	165	-	M20x28	46x46	G1/2"
VT300	180	335	354	784	173	130	30	80	32	50	F16	-	165	-	M20x28	46x46	G1/2"
VT350	270	385	410	845	195	130	30	80	32	50	F16/F25	165	254	M20x28	M16x30	46x46	G1/2"
VT400	290	520	466	956	260	130	30	80	32	60	F25	-	254	-	M16x30	55x55	G1/2"



MODEL SELECTION

MODEL	TYPE	SPRING QTY	FLANGE	SQURE	OPTION	SEALING PART
VT032	D=DOUBLE ACTING S=SPRING RETURN	ONLY FOR SPRING REST 4 5 6 7 8 9 10 11 12	F03	9×9	CAP COLOR RAL ■ 7046 ■ 9004 ■ 5021 ■ 3020 ■ 6002 ■ 5015 TYPE OF BODY P Smooth Surface + hard Anodized S Sandblasted Surface + hard Anodized (Color: Grey) H Sandblasted Surface + hard Anodized (Color: Dark Grey) F Sandblasted Surface + hard Anodized + PTFE Coated	STANDARD NITRILE RUBBER -15°C+80°C HT FLUORORUBBER (FOR HIGH TEMPERATURE) -15°C+150°C LT SILASTIC (FOR LOW TEMPERATURE) -40°C+80°C
VT050			F03/05	11×11		
VT065			F05/07	14×14		
VT075			F05/07	14×14		
VT085			F05/07	17×17		
VT095			F05/07	17×17		
VT110			F07/10	17×17		
VT125			F07/10	22×22		
VT140			F10/12	27×27		
VT160			F10/12	27×27		
VT190			F10/14	36×36		
VT210			F14	36×36		
VT240			F16	46×46		
VT270			F16	46×46		
VT300			F16	46×46		
VT350			F16/25	46×46		
VT400			F25	55×55		

Note:

- The standard rotation of double acting and spring return is clockwise to close (for double acting when port 4 is pressurised).
- The standard temperature of sealing part is -15°C to 80°C, if high temperature or low temperature required, relevant sealing parts can be used.
- All technical parameters of products please refer to this catalog. Customization for special requirement is available. Please contact the sales.
- Customization including but not limited to the items below:
 - Color combination.
 - Flange and Square custom made.
 - Higher protection level.

Model Selection Example:

- Example 1: VT095D F07/10 17 P7046
Description: Actuator model VT095, double acting, ISO flange F07&F10, 17 mm bottom square with standard indicator, P body, cap color grey (RAL7046), nitrile rubber sealing.
- Example 2: VT190S12 F10/14 36 S5021HT
Description: Actuator model VT190, single acting spring return, with 12 springs, ISO flange F10&F14, 36 mm bottom square, S body, cap color green (RAL5021), fluororubber sealing.



VALMATIC ENGINEERING SDN BHD

Lot 10, Jalan Anggerik Mokara 31/48,
Kota Kemuning, Seksyen 31,
40460 Shah Alam, Selangor, Malaysia.

Phone : +603 5122 9888 / +603 5122 0099

Fax : +603 5122 3030

Website : www.valmatic.com.my

Email : valmatic@valmatic.com.my

SUBSIDIARY OFFICES MALAYSIA

Valmatic M&E Engineering Sdn Bhd

Valmatic Automation Sdn Bhd

Valmatic Valves Sdn Bhd

INDONESIA

PT Valmatic Indonesia

Jakarta, Medan, Pekan Baru

Email : admin@valmatic.com.my